


SC/APC G.652D fibre optic pigtail

CO-S-000-SCA-2D-0,9-2-YE

Pigtail is the optical fibre section with connector at its one end, being the final element of a optical fibre line. It is connected to the line by means of thermally or mechanically welded joint.

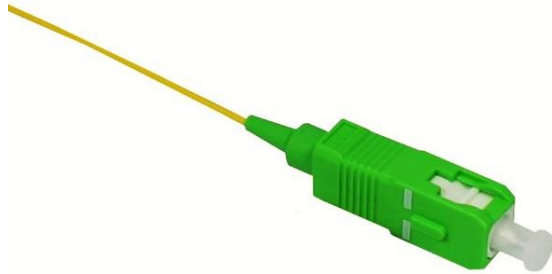

SC/APC G.652 D fibre optic pigtail

features:

- single-element structure,
- push-pull latch-type connector,
- main part and body made of plastics,
- green body and boot.

included in a set:

- one pigtail packed in a separate ziplock bag.

standards and certificates:

- IEC 61754-4
- TIA/EIA 604-3

sectors:



technical specifications:

CO-S-000-SCA-2D-0.9-2-YE	
insertion loss [dB]	< 0.25 dB
reflectance [dB]	> 65 dB
fibre type as per ITU-T	single mode, G.652D
durability, repeatability	1000 cycles
mechanical strength, load [N]	100
tube diameter [mm]	0.9
length [m]	2.0
working temperature [°C]	-40 to +85

ordering:

0	description
CO-S-000-SCA-2D-0.9-2-YE	CONNECTICO SC/APC pigtail, SM G.652D 2 m, yellow colour