


GAP

The GAP series subscriber sockets are designed to terminate subscriber lines

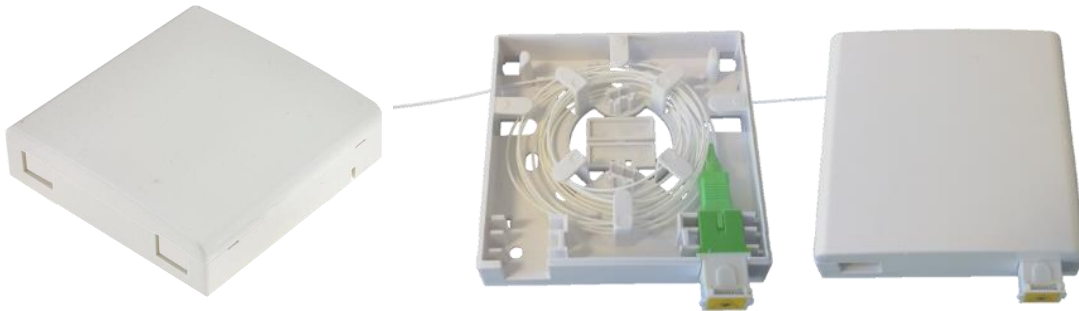

Customer termination box

features:

- wall mounting,
- enables installation on 60 mm flush-mounted box ensures high aesthetics of the installation of The residential installation,
- the cover of the socket is snap-closed,
- possibility to finish two fiber optic fibers,
- the location of the adapter (optionally two) from the bottom of the housing provides protection against laser radiation,
- possibility of cable entry through one of the 7 holes, including through the back wall,
- a separate part for collecting a pigtail supply,
- the socket design ensures a safe positioning of the fiber optic,
- the subscriber's socket is not equipped as a connecting socket inside the building.

included accessories:

- a set of assembly screws.

optional accessories and products:

- heat-shrinkable weld seams,
- SC / APC type adapter with safety flap,
- pigtaile SC / APC with G.657 fiber.

sectors:



GAP

technical specifications:

GAP	
dimensions [width x height x depth][mm]	85 x 85 x 24
max. number of cable inputs	7
max. number of commutation fields	2
max. number of thermal or mechanical welds	2
recommended length of pigtails [m]	1,5
material	ABS, white
weight [g]	42
IP protection	IP 20

ordering:

0	1	2	description
GAP-			customer termination box
	A		adapter SC/APC – 1 art.
	2A		adapter SC/APC – 2 art.
		P	pigtail – 1 art.
		2P	pigtail – 2 art.
		2A-2P	adapter – 2 art., pigtail 2 art.