

## PSP-EE series

PSP-EE series telecommunication optical distribution frame dedicated for installation in 19" and 21" cabinets or racks.



PSP-EE-1U-24 ODF - SC/E2 simplex and SC duplex

### features:

- product designed for installation in 19" and 21" cabinets or racks (with reducers) including SPS,
- capacity of 24 switching panels: SC simplex/duplex, E2000, LC duplex, LC quad) space for cable tubes and pigtails spare to storage up to 1.5m length,
- perforated holes and handles for better organizing patchcords with cable ties,
- smooth and easy adjustment of the mounting depth,
- cables can be introduced by PG gland,
- replaceable front panels closed by snap pins,
- patch panel with permanent numbering,
- path switching operation does not disturb the adjacent paths.

### equipment:

- fiber splice cassettes SK-24-FCA or SK-24-Z-FCA (acc. to configuration),
- cable ties,
- mounting kit.


### options ordered separately:

- adapters (SC simplex/duplex, E2000, LC duplex/quad),
- pigtails,
- fusion splice protection sleeves,
- reducers for 21" cabinets or racks:  
a) RED-21-1U (standard spacing),  
b) RED-21-1U/E (ETSI spacing).

### standards and certificates:

- flammability class V0 acc. UL94
- RoHS 2011/65/UE
- PN-EN 60825-2:2009
- ITU-T L.202 (07/10)
- EN ETS 300119

### sectors:

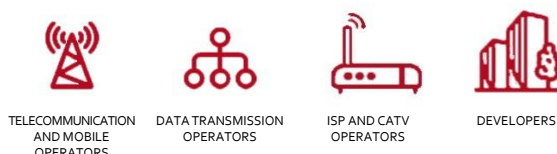

## PSP-EE series

### technical specifications:

PSP-EE	
dimension [width x height x length][mm]	483 x 44 x 210
rack height [U]	1
number of adapters	24
type of fiber splice cassette with cover	SK-24-FCA-SET / SK-24-Z-FCA-SER
number of fiber splice cassettes [24J]	1 (2**) (4***) xK9 – where "x" is a number, K00 means without splice cassette] xK9Z – where "x" is a number
weight [kg]*	1,8
material	powder painted steel, colour grey RAL7035 or black RAL9005

\* weight without additional equipment,

\*\* standard in the SCD version for 24 SC duplex,

\*\*\* standard in the SCD version for 24 LC quad.

### configurations:

code					description
PSP-EE					PSP-EE optical distribution frame
	G21				depth 210 mm
		1U			rack height 1U
			24		number of adapters in 1U patch panel
				SC/E2	patch panel: SC/E2000 (also compatible with LC duplex)
				SCD	patch panel: SC duplex (also compatible with LC quad)
				1K9	1 fiber splice cassette with cover (for 24 SC adapters, E2000 simplex)
				2K9Z	2 tippable fiber splice cassettes with cover (for 24 SC duplex and LC duplex adapters)
				4K9Z	4 tippable fiber splice cassettes with cover (for 24 LC quad adapters)