


## Series PSP-P

Patch panel applicable to optical nodes.

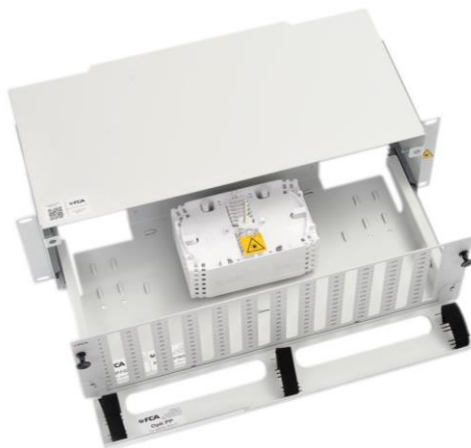

PSP-P-G21-3U-144 with patchcord guide

### features :

- designed for 19" cabinets and racks (21" mounting standard available),
- pull-out version, sliding on a metal shelf,
- front panel with fast lock RICHCO system,
- lightweight construction,
- capacity from 12 to 144 fibers,
- 1U/2U/3U height and 210/280 mm depth versions available,
- mounting depth adjustment,
- pigtails reserve storage with handles,
- front panels for E2000, SC, FC, and other adapter standards,
- perpendicular and parallel cable entries,
- recommend to use OPTI PP patchcord guides.

### accessories :

- SK-24-FCA - splice cassettes,
- SK-24-FCA-COVER - splice cassettes cover,
- assembly screws,
- fixing set,
- cable ties,
- velcro ties.

### optional accessories and products :

- adapters,
- pigtails,
- patchcords,
- fiber splice protector,
- OPTI PP patchcord guide,
- adapters brackets for 21" racks 21" RED-21-1U, RED-21-2U, RED-21-1U-E, RED-21-2U-E.

### standards and certificates :

- V0 wg UL94,
- RoHS 2011/65/EU,
- PN-EN 60825-2:2009,
- ITU-T L.202 (07/10),
- PN-ETSI EN 300 019-1-3 V2.4.1:2014-11.

### sectors :



TELECOMMUNICATION  
AND MOBILE  
OPERATORS



DATA TRANSMISSION  
OPERATORS



ISP AND CATV  
OPERATORS



ENERGETICS



DESIGN AND EXECUTION  
COMPANIES



DEVELOPERS



UNIVERSITIES



INTEGRATORS



MILITARY



RAILWAY

## Series PSP-P

### technical specifications:

PSP-P-G21/G28-	1U	2U	3U
dimensions [width/height/depth] [mm]	483/44/210(280)	483/88/210(280)	483/132/210(280)
height	1U	2U	3U
adapters number	12, 24	48, 72	96, 144
number of SK-24-FCA splice cassettes	1 for 12 and 24 splices	2 for 48 splices 3 for 72 splices	4 for 96 splices 6 for 144 splices
max. SK-24-FCA splice cassettes number	2	5	10
recommended pigtails length [m]	2-2,5	2-2,5	2-2,5
weight [kg]	3	4,1	5
material	sheet steel, RAL7035 colour		