


## Series PSP-T

Patch panel applicable to optical nodes.

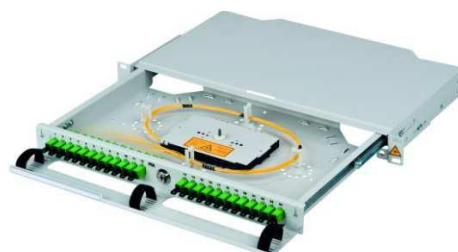

Equipped of PSP-T patch panel

### features:

- designed for 19" cabinets and racks (21" mounting standard available),
- pull-out version with telescope slides,
- front panel with fast lock RICHCO system,
- lightweight construction,
- 1U/2U height and 210/280 mm depth versions available,
- capacity from 12 to 72 fibers,
- mounting depth adjustment,
- front panels for E2000, SC, FC, LC and other adapter standards,
- front panels with lock and patchcord guides,
- pigtailed reserve storage with handles,
- patchcord guide with space for description,
- double multicable entries with PG 13,5 cable glands,
- blanking plugs for unused cable entries,
- possibility to ground patch panel.

### accessories:

- SK-24-FCA - splice cassettes,
- SK-24-FCA-COVER - splice cassettes cover,
- OPTI PP patchcord guide,
- key lock mounted,
- assembly screws,
- entrance handles with PG13, cable glands,
- blanking plugs,
- cable ties,
- velcro ties.

### optional accessories and products:

- adapters,
- pigtailed,
- patchcords,
- fiber splice protector,
- adapters brackets for 21" racks 21" RED-21-1U, RED-21-2U, RED-21-1U-E, RED-21-2U/E.

### standards and certificates:

- V0 wg UL94,
- RoHS 2011/65/EU,
- IEC 60825-2:2009,
- ITU-T L.202 (07/10),
- PN-ETSI EN 300 019-1-3 V2.4.1:2014-11.

### sectors:



## Series PSP-T

### technical specifications:

PSP-T-G21/G28-	1U	2U
dimensions [width/height/depth] [mm]	483/44/210(280)	483/88/210(280)
height	1U	2U
adapters number	12, 24	48, 72
number of SK-24-FCA splice cassettes	1 for 12 and 24 splices	2 for 48 splices 3 for 72 splices
max. SK-24-FCA splice cassettes number	2	5
recommended pigtails length [m]	2-2,5	2-2,5
weight [kg]	3,5 (2,8)	4,5 (3,8)
material	sheet steel, RAL7035 colour	