

PMS-LGX-P-19-xU

The PMS-LGX shelf is used for mounting LGX modules in indoor and outdoor cabinets of FTTx nodes.

main features:

- shelves intended for LGX standard modules mounting,
- modules mounted snap-on with Richco pins,
- possibility of mounting in 19" racks and cabinets (optionally 21" after using reducers),
- shelves with a height of 4U equipped with organizational half-drums ensuring a safe bending radius of the patchcords in the cabinet with the possibility of configuring their location.




PMS-LGX-P-19-1U



PMS-LGX-P-19-2U



PMS-LGX-P-19-3U

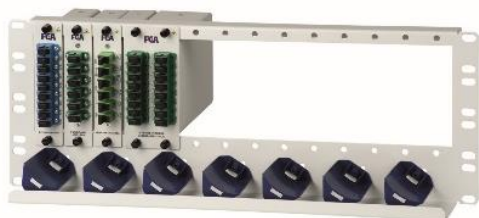

PMS-LGX-P-19-4U

sectors:



TELECOMMUNICATION
AND MOBILE
OPERATORS



DATA TRANSMISSION
OPERATORS



ISP AND CATV
OPERATORS



ENERGETICS



DESIGN AND
EXECUTION
COMPANIES



UNIVERSITIES



INTEGRATORS



UTILITIES



RAILWAY

PMS-LGX-P-19-xU

technical specifications:

PMS-LGX-	19-1U	19-2U	19-3U	19-4U
height[mm]	44 (1U)	88 (2U)	132 (3U)	176 (4U)
width [mm]	486	486	486	486
depth [mm]	15	15	40	120
Max number of LGX	3	6	14	14
Max number of LGX2	-	3	7	7
Max number of LGX4	-	-	3	3
Max number of LGX8	-	-	1	1
Weight [kg]	0,26	0,39	0,5	0,7
Material	powder coated steel, color RAL7035			

ordering:

0	description
PMS-LGX-P-19-1U	LGX modules shelf, height 1U, to use in 19,, cabinets, up to 3 LGX modules
PMS-LGX-P-19-2U	LGX modules shelf, height 2U, to use in 19,, cabinets, up to 6 LGX modules
PMS-LGX-P-19-3U	LGX modules shelf, height 3U, to use in 19,, cabinets, up to 14 LGX modules
PMS-LGX-P-19-4U	LGX modules shelf, height 4U, to use in 19,, cabinets, up to 14 LGX modules, contains half-drums to lead the patchcords