

Optical distribution frame cabinet

SPS - N

An SPS-N cabinet for server rooms.



SPS-N 45U

main features:

- usable height 45U;
- removable side and rear covers;
- solid locking glass door;
- two pairs of 19" mounting posts in the front and rear;
- possibility to mount active devices with 19" spacing;
- cabinet optimized for mounting PSP series panel distribution frames and PMK-19-3U compact module shelves;
- inside the cabinet, there is a separate 200 mm wide cable compartment to increase safety and ergonomics of the station side cabling;
- grommets for guiding patch cords in and out at the top and bottom of the cabinet;
- recommended capacity of up to 288 fibers with station cables routed outside, or up to 576 fibers with cross-connecting inside the cabinet;
- ingress protection IP20.

market segments:



TELECOMMUNICATIONS AND MOBILE



DATA TRANSMISSION OPERATORS



ISP AND CATV OPERATORS



ENERGY SECTOR



DESIGNERS AND CONTRACTORS



DEVELOPERS



UNIVERSITIES



SYSTEM MANUFACTURERS AND INTEGRATORS



UNIFORMED SERVICES



UTILITY COMPANIES



RAILWAY

includes:

- an integrated side management channel with 5 half reels of spare BZ-3 patch cords;
- glass front door;
- removable covers;
- 4 support beams at 19" spacing;
- foam and brush grommets in the top and bottom plates;
- RTR-8 tube manifold;
- grounding strip and cords.


options to be ordered separately:

- PSP series panel distribution frames;
- shelves for PMK, NGR PMK FA 8/4U cassette modules;
- power strip (selected after consultation with the FCA proposal department);
- cabinet plinth (selected after consultation with the FCA proposal department);
- KMK 3U/12/12 compact cassette module;
- PMK commutation panel.

standards/certificates

- flammability class V0 to UL94;
- PN-EN 60529:2003;
- RoHS 2011/65/EU;
- Directive 2014/35/EU;
- Directive 2001/95/EC.

SPS - N

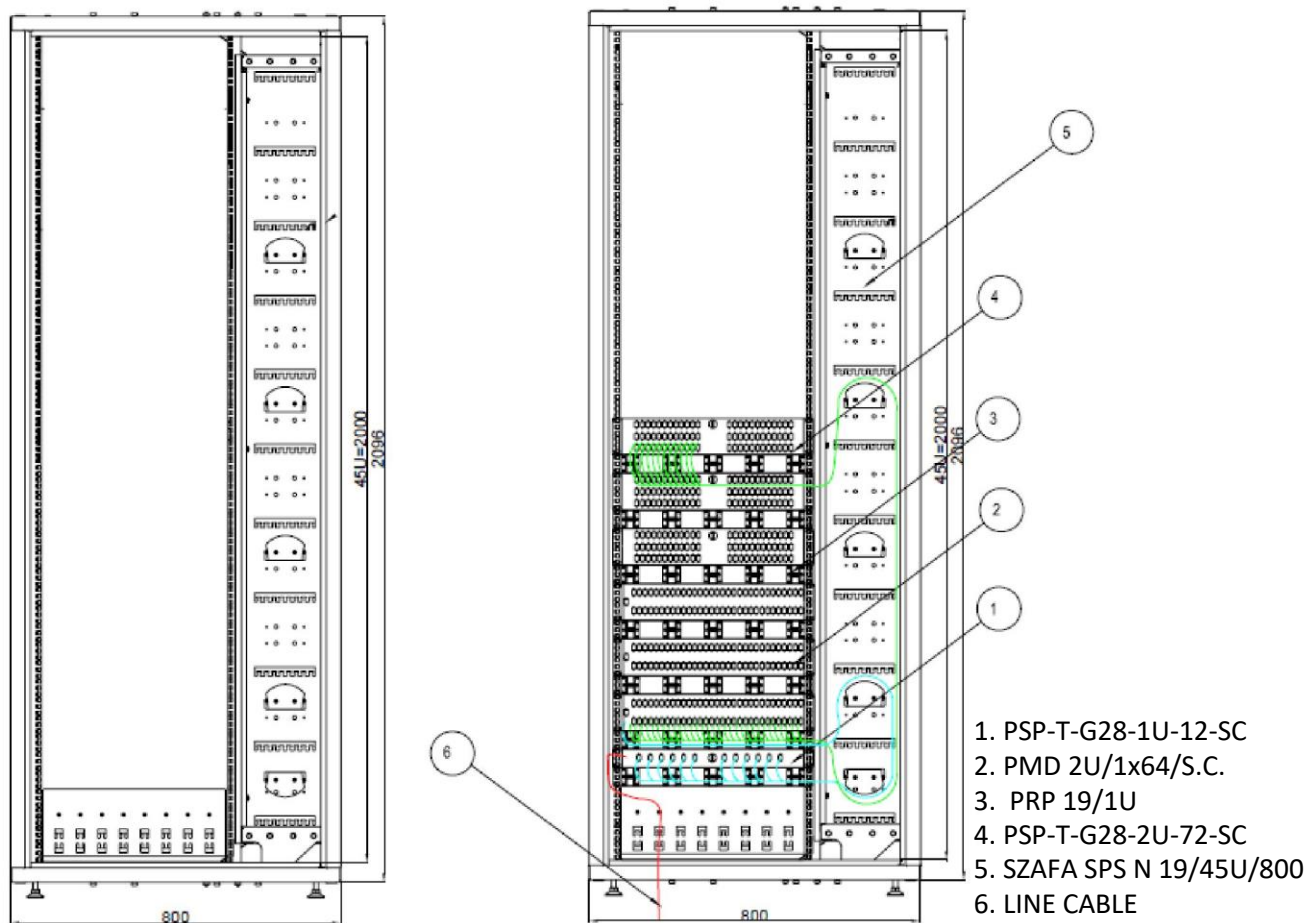

technical parameters:

SPS-N-800	42U	45U
recommended cabinet capacity	288J	
max. number of fiber optic cables	8	
forming module type	RTR-8	
foam grommet 380 x 40 [mm]	1 pcs up, 1 pcs down	
brush grommet 200 x 76 [mm]	1 pcs up, 1 pcs down	
brush grommet 370 x 45 [mm]	1 pcs up, 1 pcs down	
usable height	42U	45U
dimensions [W x H x D] [mm]	800 x 2150 x 600	800 x 2235 x 600
weight [kg]	125	128
color	RAL 7035	